

General Description


Body Repair Description

How to use this manual describing the procedures for removing and installing of body panels







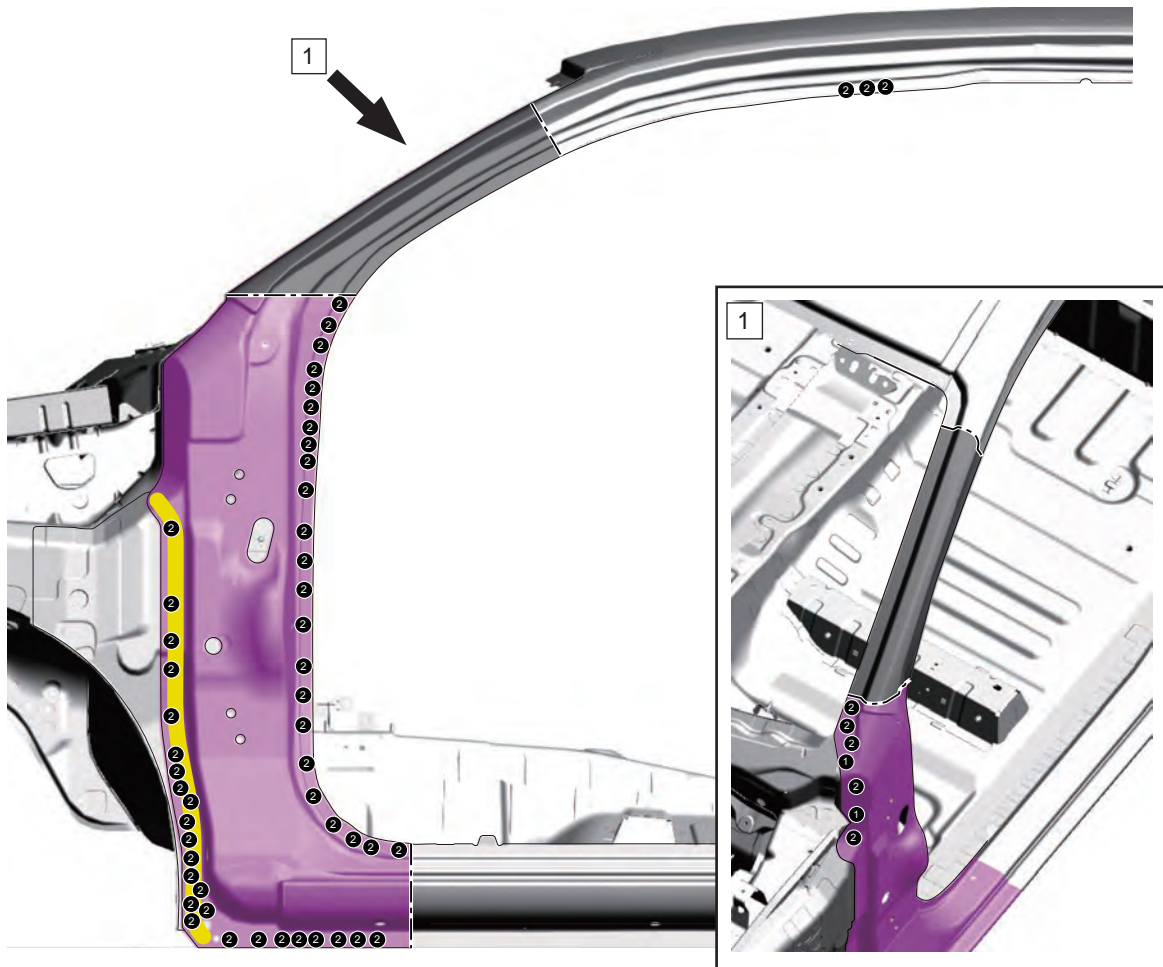




1. Meanings of the symbols

Note :

- The following key points in the title "Body panel removal/installation" are described with illustrations and symbols: procedures for separating welded parts, procedures for welding and the number of welding points.



6 Body Structure

Symbol	Definition	Remarks
	Detach Welding (one panel thickness)	This symbol indicates that only one panel should be removed from panel structure.
	Detach Welding (two panel thickness)	This symbol indicates that two panels should be removed from panel structure.
	Spot Welding (two panel thickness)	Use a spot weld machine appropriate for the type and thickness of the panel of the welding point.
	Spot Welding (three panel thickness)	
	Plug Welding (two panel thickness)	
	Plug Welding (three panel thickness)	
	Make Cut	
	Continuous MIG-Welding	
	Tack Welding	
	Fillet Welding	
	Body Sealer	This mark is used for important points that need water proof treatment especially.