

Wheel house panel Removal and Installation




Note :

- The figure shows condition where the front fender, the deflector panel and the cowl side reinforcement are removed.
- Welding method and number of welding points are the same on both sides.

Removal :

1. Drill out welding spots and remove the wheel house panel.

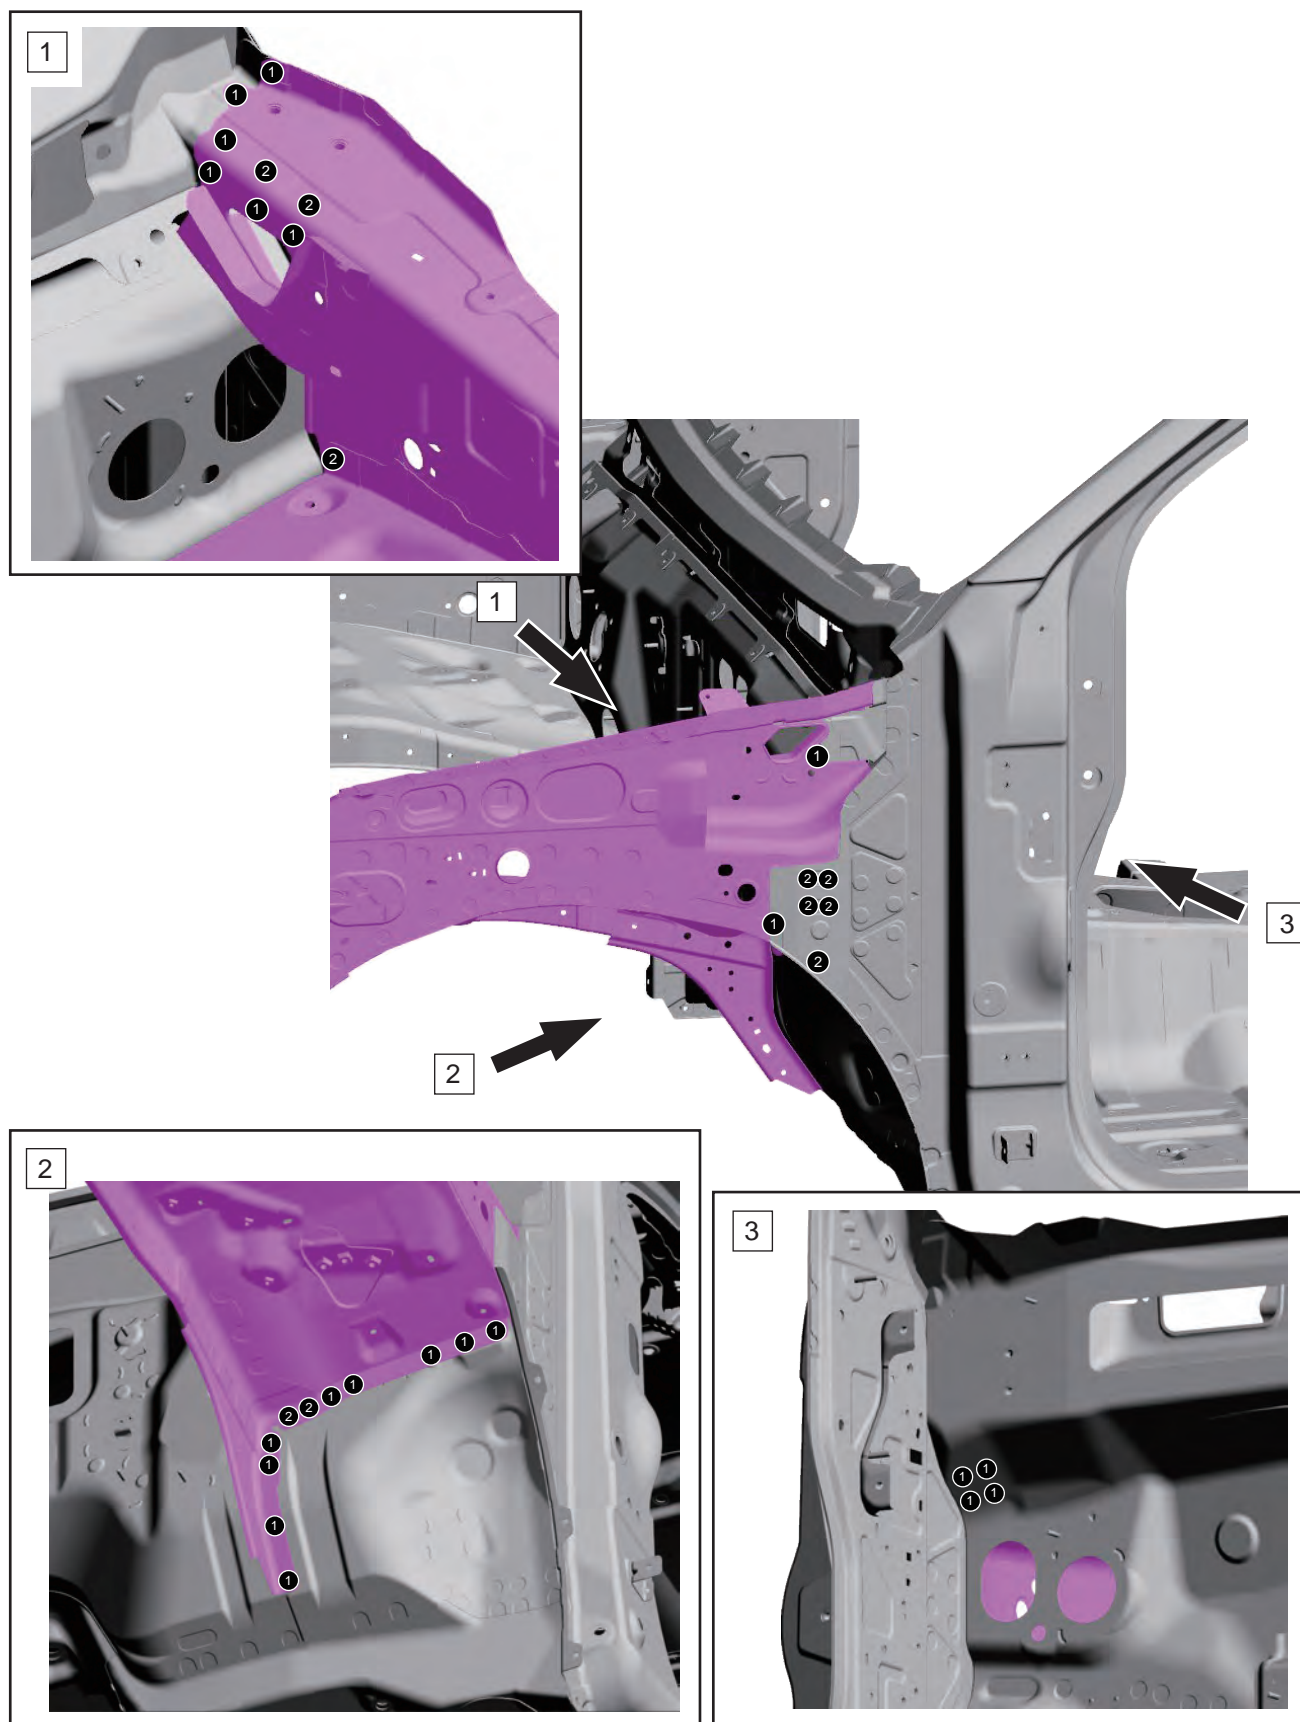

Installation :

1. Install the wheel house panel.
2. Conduct resistance spot weld and plug weld.

