

## Cab mounting bracket No.1 Removal and Installation




**Note :**

- Welding method is the same on both sides.


**Removal :**

1. Use a belt sander or the like, scrape off the rivet crimp to remove the cab mounting bracket No.1.

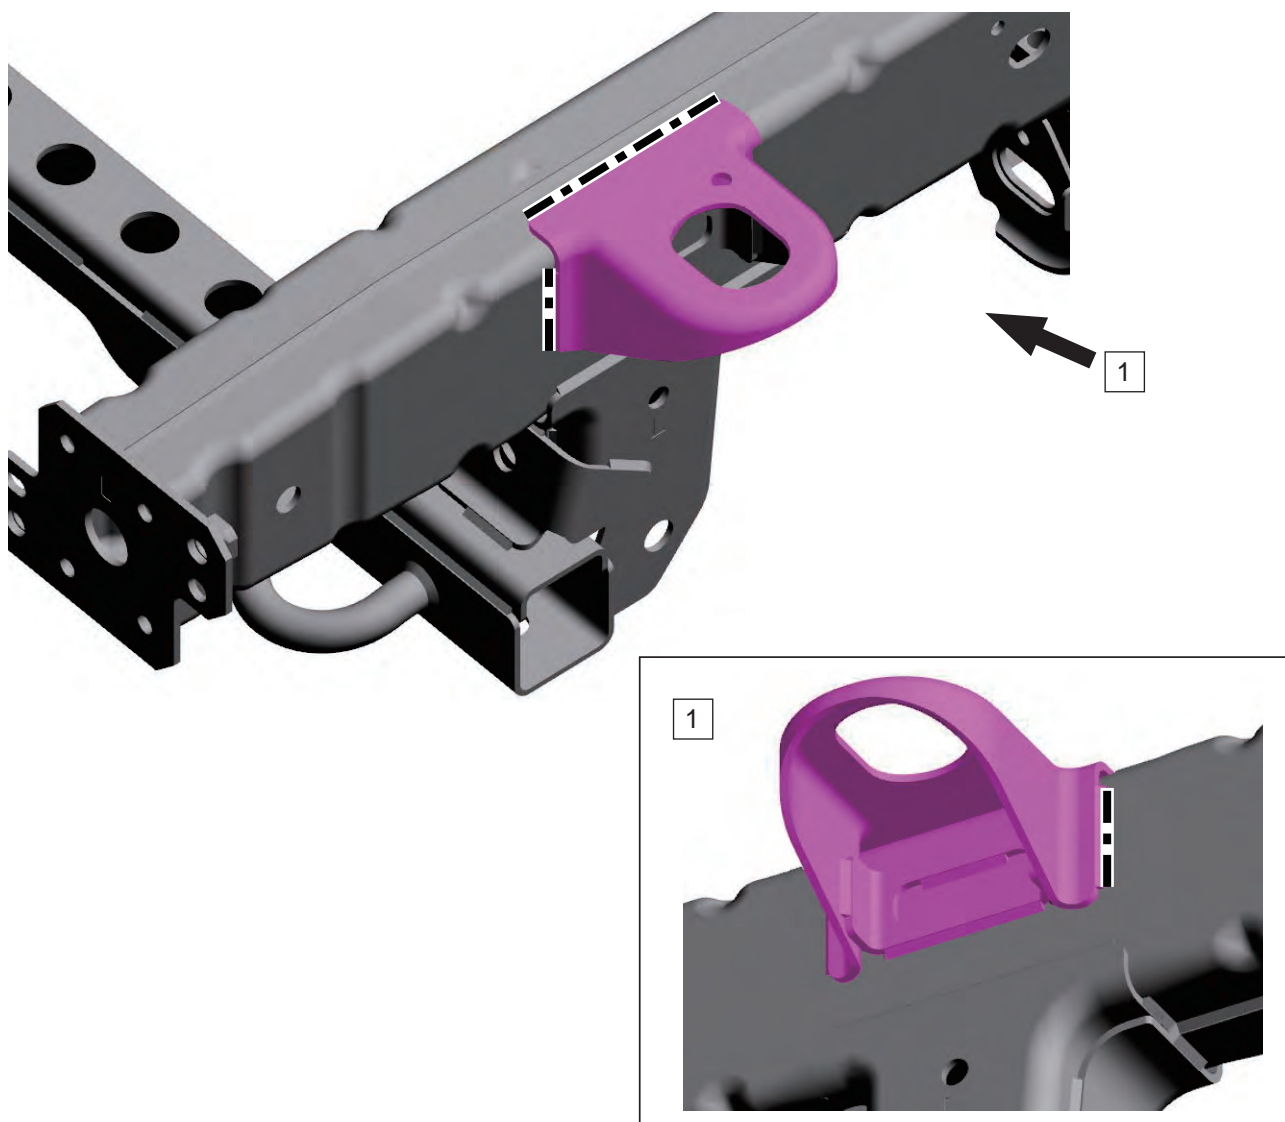

*Installation :*

1. Install the cab mounting bracket No.1.
2. Conduct fillet weld.

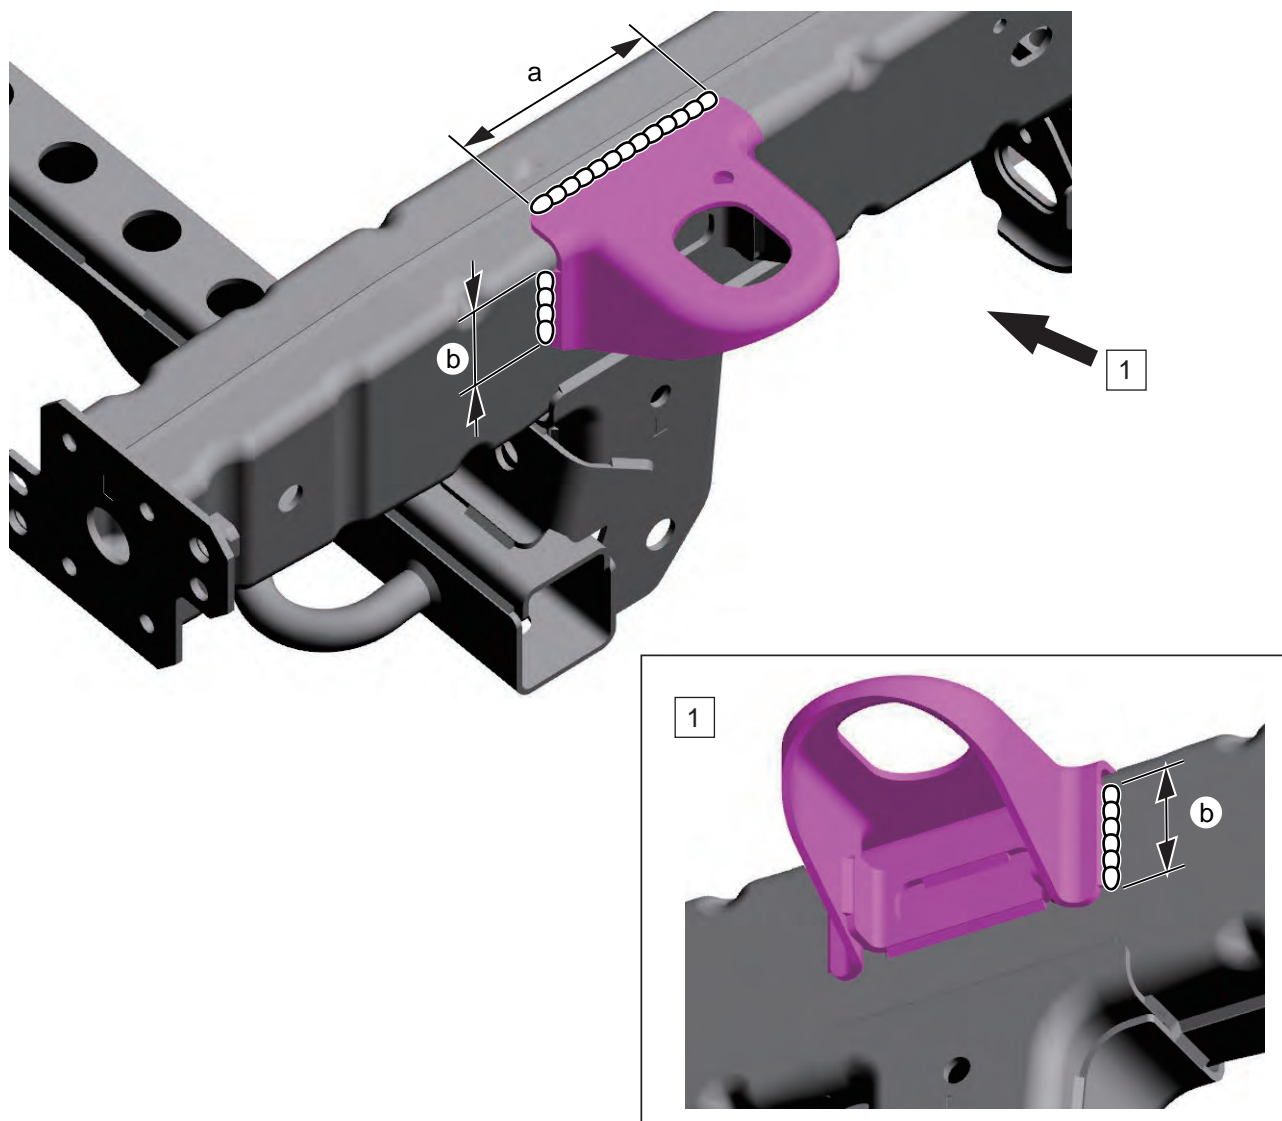

- a. 87 mm {3.43 in}  
b. 39 mm {1.54 in}