

Rear body mounting bracket A Removal and Installation (for Regular Cab / Extended Cab)





Note :

- Welding method is the same on both sides.



Removal :

1. Use a belt sander or the like, scrape off the rivet crimp to remove the rear body mounting bracket A.

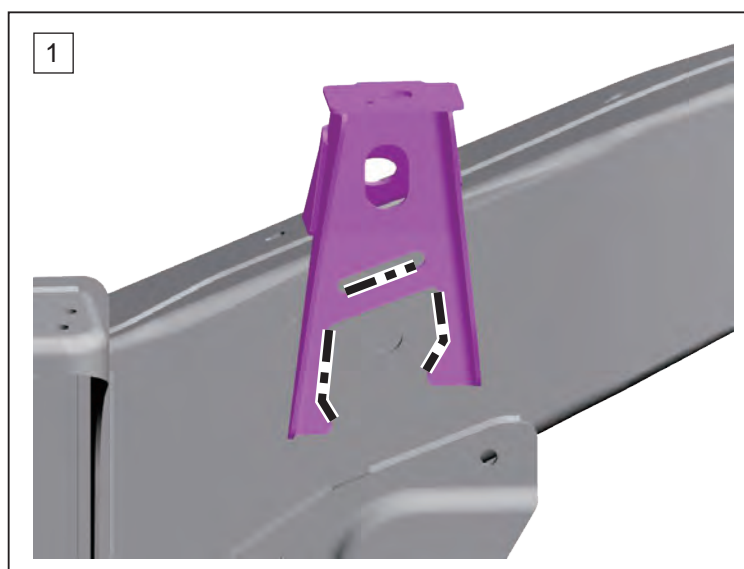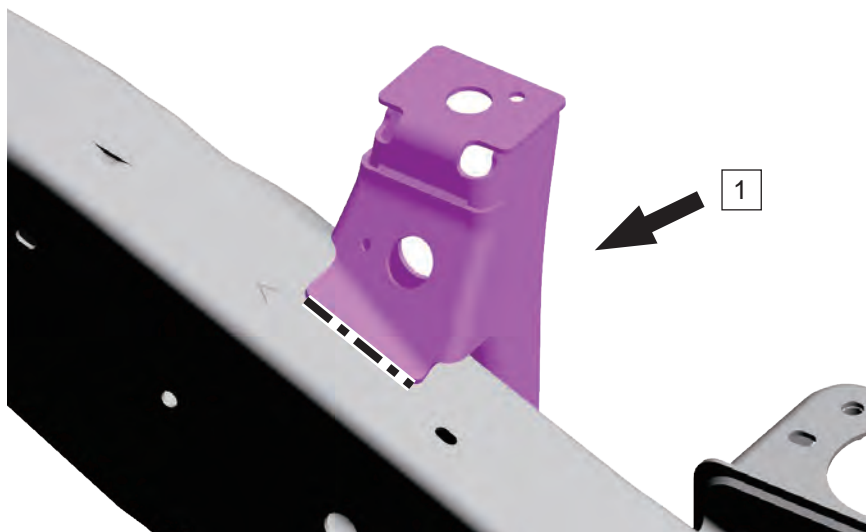

Installation

1. Install the rear body mounting bracket A.
2. Conduct fillet weld.

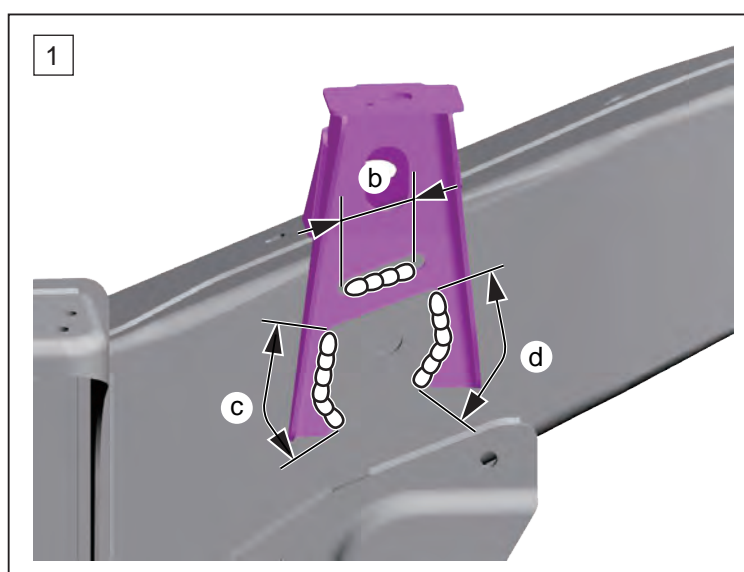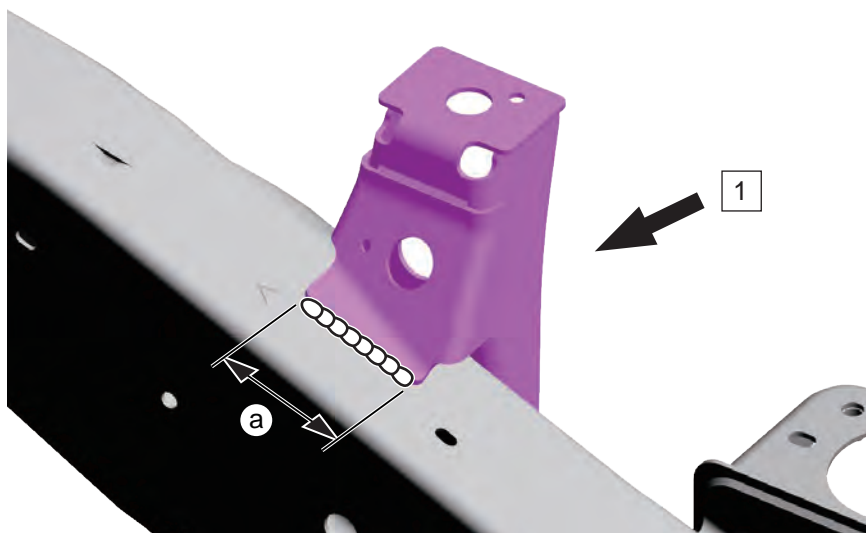

- a. 60 mm {2.36 in}
 - b. 39 mm {1.54 in}
 - c. 55 mm {2.17 in}
 - d. 49 mm {1.93 in}
-