

Cab mounting bracket No.2 Removal and Installation





Note :

- Welding method is the same on both sides.




Removal :

1. Use a belt sander or the like, scrape off the rivet crimp to remove the cab mounting bracket No.2.

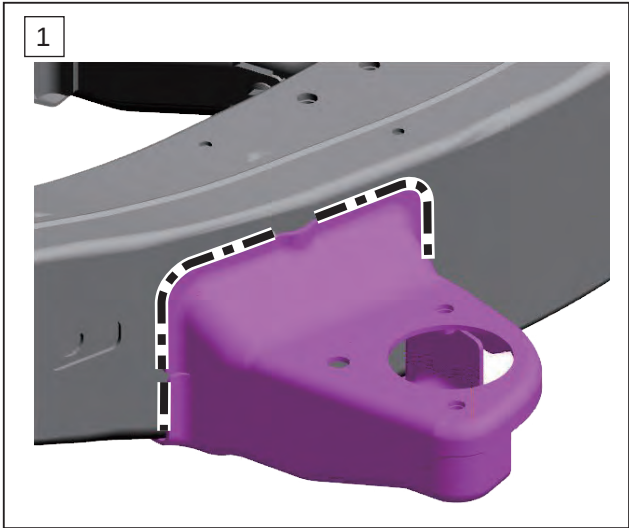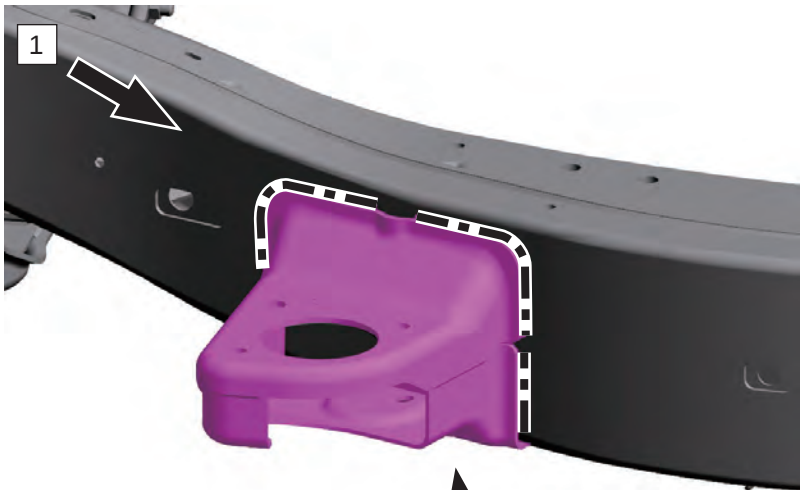

Installation :

1. Install the cab mounting bracket No.2.
2. Conduct fillet weld.

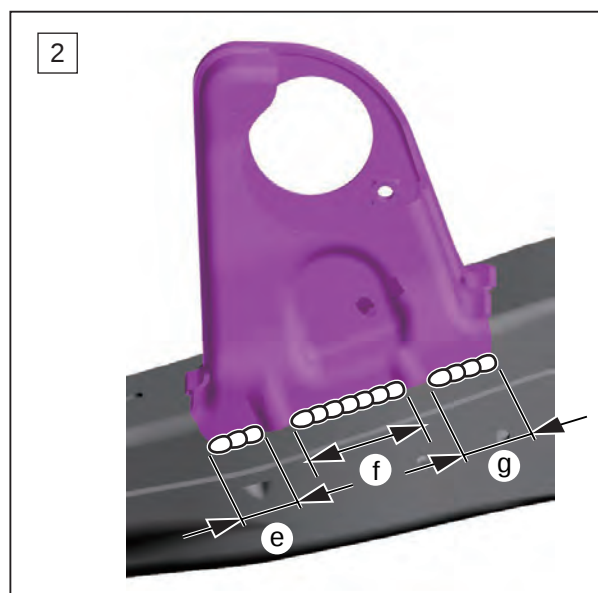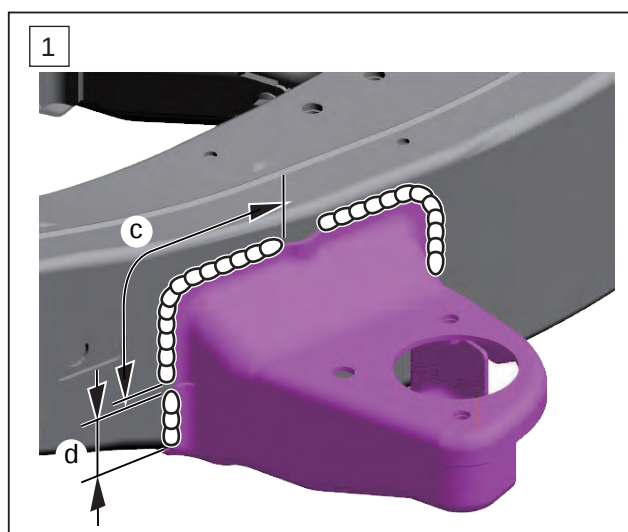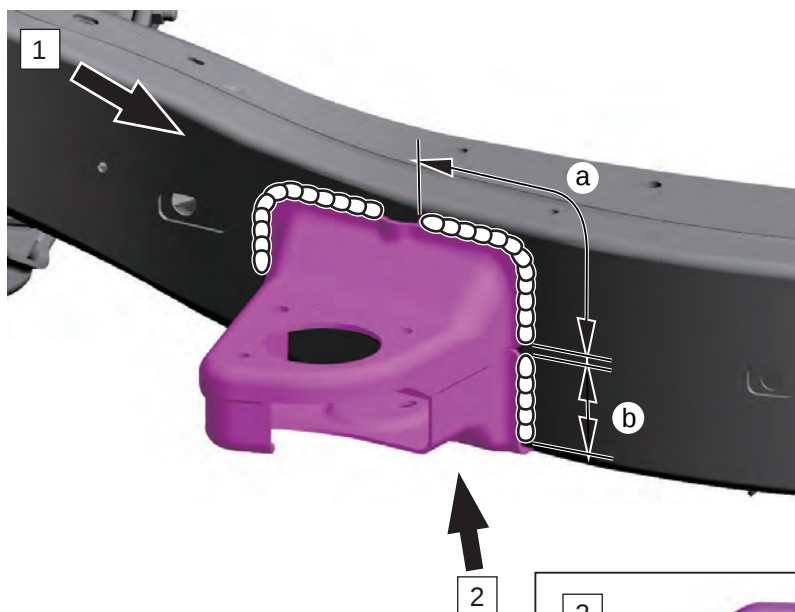

- a. 136 mm {5.35 in}
- b. 52 mm {2.08 in}
- c. 139 mm {5.47 in}
- d. 29 mm {1.14 in}
- e. 31 mm {1.22 in}
- f. 63 mm {2.48 in}
- g. 40 mm {1.57 in}