




MAZDA MX-30

Body Type: WAGON
(2020-)

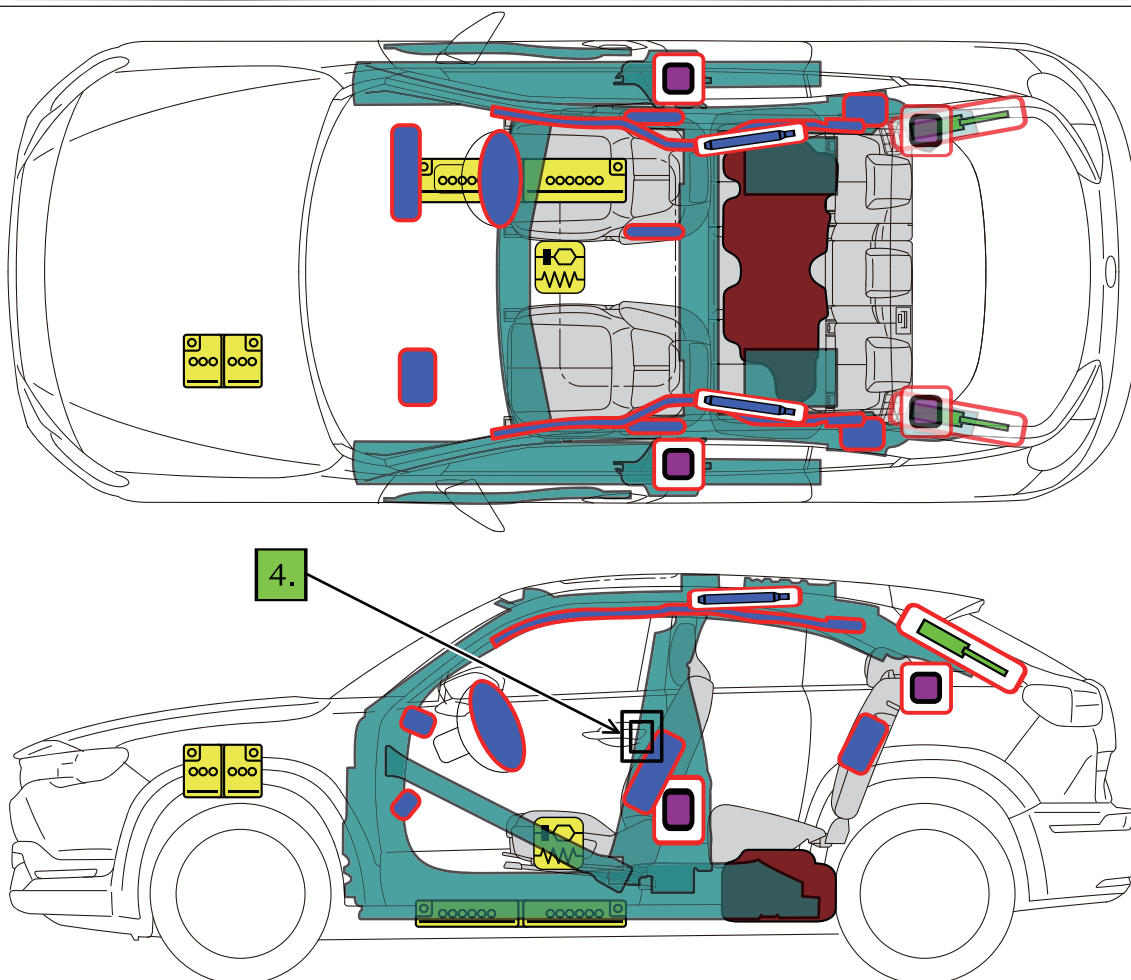

	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Pedestrian protection active system
	Automatic rollover protection system		Gas strut / Preloaded spring		High strength zone		Zone requiring special attention		
	Battery low voltage		Ultra capacitor, low voltage		Fuel tank		Gas tank		Safety valve
	High voltage battery pack		High voltage power cable / component		High voltage disconnect		Fuse box disabling high voltage system		Ultra capacitor, high voltage
	High voltage disconnect (cutting solution)		Disconnect high voltage device		Fuel tank content gasoline / ethanol				

This sheet is applicable for MAZDA MX-30, R.H.D., e-SKYACTIV G, and Wagon.

ID No.

RSE-DRRCW-A

Version No.

1.0

Page No.

1 / 4

1. Identification / recognition




LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF: SILENT MOVEMENT OR INSTANT RESTARTCAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN. WEAR APPROPRIATE PPE.




2. Immobilisation / stabilisation / lifting

IMMOBILIZE THE VEHICLE

- Block the wheels.
- Set the parking brake.
- Put the car in P position.

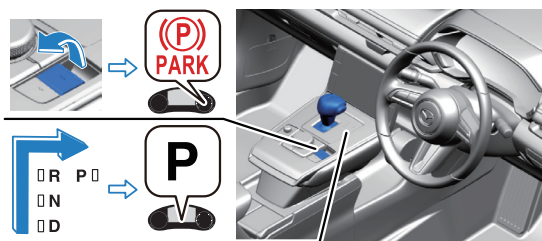

LIFTING POINTS

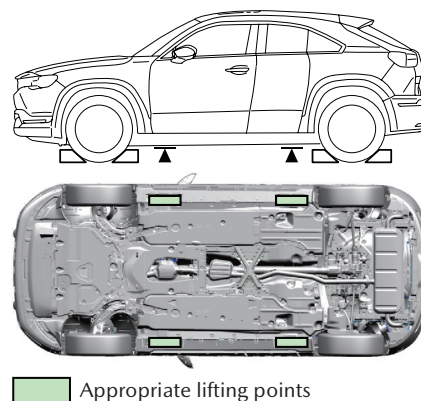

Appropriate lifting points

3. Disable direct hazards / safety regulations

Systems that do not operate if power is lost

Door lock



Power window



Power seat




Shift-by-wire







Electric parking brake (EPB)



Electric liftgate opener




Disabling systems

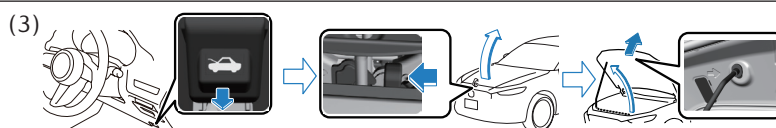

4. Access to the occupants

Glass types

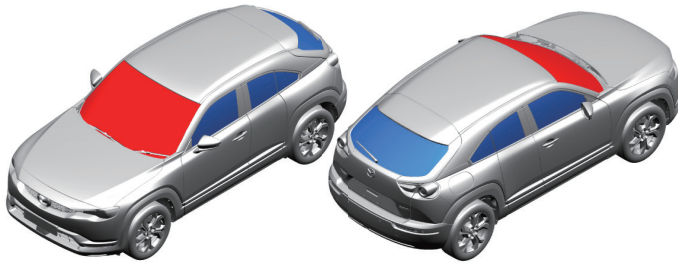


Laminated glass



Tempered glass

High strength steel in body

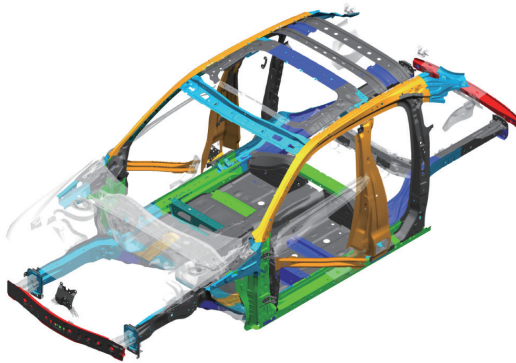


■	1800 MPa {18355 kgf/cm ² , 261068 psi}
■	1500 MPa {15296 kgf/cm ² , 217557 psi}
■	1310 MPa {13358 kgf/cm ² , 190000 psi}
■	1180 MPa {12032 kgf/cm ² , 171145 psi}
■	980 MPa {9993 kgf/cm ² , 142137 psi}
■	780 MPa {7954 kgf/cm ² , 113130 psi}
■	590 MPa {6016 kgf/cm ² , 85572 psi}


Steering wheel angle adjustment



Free-style door operation method

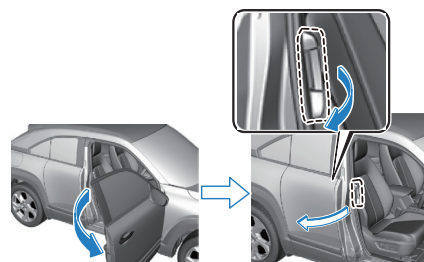

Seat position operation

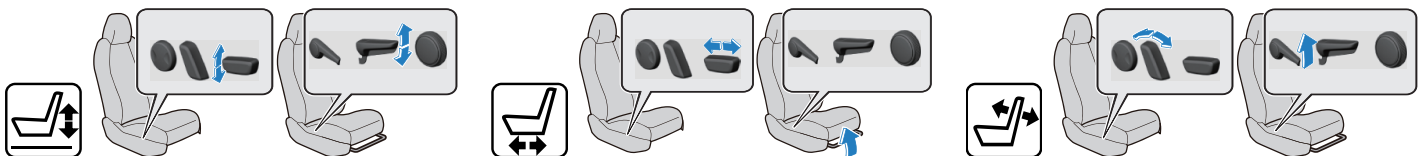

5. Stored energy / liquids / gases / solids

	Li-ion / DC 24V	
	Pb / DC 12V	
	R-134a / 490 g {17.3 oz}	
	Gasoline / 51.0 L {13.5 US gal, 11.2 Imp gal} (2WD) / 48.0 L {12.7 US gal, 10.6 Imp gal} (AWD)	

6. In case of fire




EXTINGUISH THE FIRE USING LARGE AMOUNTS OF WATER OR AN ABC FIRE EXTINGUISHER.



7. In case of submersion

8. Towing / transportation / storage

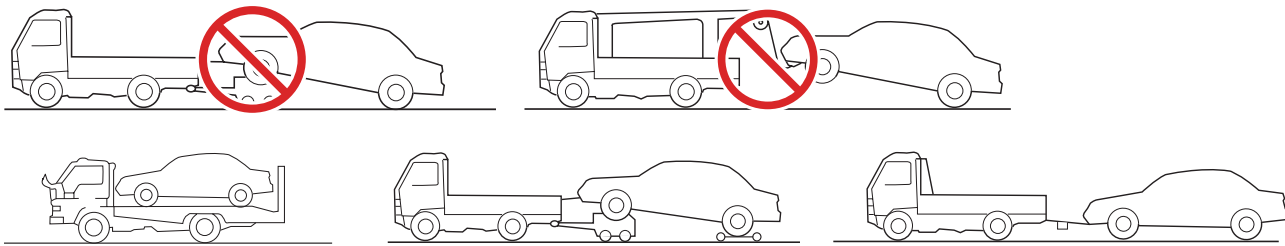

KEEP THE VEHICLE OUTDOORS AWAY FROM FLAMMABLES.

10. Explanation of pictograms used

	Vehicle on fuel of liquid group 2 Gasoline/ethanol		Air conditioning component		Hazardous to the human health
	Right hand drive		General warning sign		Door-lock control
	Bonnet		Use water to extinguish the fire		Window lift (power-operated)
	Steering wheel, tilt control		Use ABC powder to extinguish the fire		Parking brake
	Seat adjustment, longitudinal		Explosive		Laminated glass
	Seat height adjustment		Gases under pressure		Tempered glass
	Seat adjustment, seat back recline		Flammable		
	Lifting point; central support		Corrosives		